TELTONIKA

TRB140

INDUSTRIAL RUGGED LTE GATEWAY

TRB140 360° VIEW

TRB140 is an ultra-small, lightweight, and energy-efficient IoT device with mission-critical LTE Cat 4 and Gigabit Ethernet connectivity options. Linux environment offers a high degree of customization. This gateway is perfect for projects and applications where a single device must be upgraded with reliable and secure internet connectivity.

CONNECTIVITY
4G LTE (Cat 4), 3G, 2G

COMPACTNESS
Small size, easy installation

PROTOCOLS
Compatible with industrial DNP3 & Modbus communication protocols

RMS
Compatible with Teltonika Networks Remote Management System

RMS
REMOTE MANAGEMENT SYSTEM

COMPATIBLE WITH TRB140

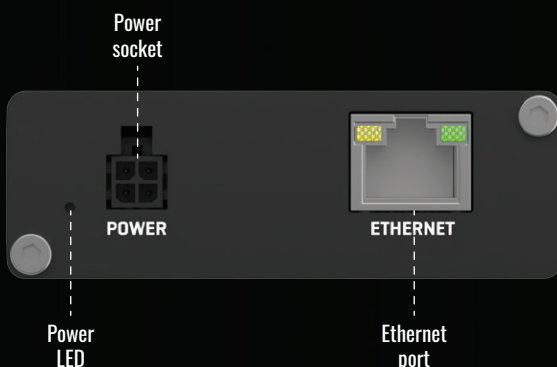MANAGEMENT | ALERTS | CONFIGURATION | ACCESS | FOTA

KEY FEATURES

HARDWARE

Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Qualcomm, ARM Cortex A7, 1.2 GHz
Storage	512 MBytes Flash (200 MBytes for userspace)
Memory	128 MBytes RAM (50 MBytes for userspace)
Powering option	4pin power socket, 9-30 VDC
SIM	1 x Internal SIM holder (2FF)
Antenna connectors	1 x SMA for mobile
Ethernet	1 x 10/100/1000 Ethernet port
Inputs/Outputs	On 4pin socket: 2 x Digital input/Digital open collector output (configurable)
Other	1 x Micro USB slave
Status LEDs	3 x Connection type, 5 x Signal strength, 2 x Ethernet, 1 x Power
Operating temperature	40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option
Dimensions (W x H x D)	74.5 x 25 x 64.4 mm
Weight	134 g

SOFTWARE

Operating system	RutOS
Mobile features	Auto APN, Band lock, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, TelnetDHCP, Telnet
Firewall	Port forward, Traffic rules, Custom rules, Pre-configured firewall rules, NAT, NAT-T, NAT helpers, Unlimited firewall configuration via CLI
Security	DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), Port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks)
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, SSTP, Stunnel, DMVPN L2TP, ZeroTier, WireGuard
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
SMS features	WEB UI, CLI, SSH, SMS, TR-069, SNMP, JSON-RPC, MQTT, RMS

FRONT VIEW

Power socket

POWER

ETHERNET

Power LED

Ethernet port

BACK VIEW

Mobile amtenna connector

REMOVE PANEL TO INSERT SIM

2G 3G 4G

USB

MOBILE

RESET

USB connector

Reset button