

TSW200 Poe+ GIGABIT ETHERNET SWITCH

// TSW200 is industrial unmanaged switch from Teltonika Networks.

// TSW200 is equipped with 2 SFP ports for long-range Fiber-optic communication and 8 Gigabit Ethernet ports which support IEEE802.3af and IEE802.3at Power-over-Ethernet standards.



FLYER // TSW200

TSW200 360° VIEW



TELTONIKA | Networks

K Barsausko st. 66

TELTONIKA | Networks

KEY FEATURES

HARDWARE


Powering option	2 pin, push-in, terminal block			
Input voltage range	7-57 VDC			
Input voltage range for PoE	44-57 VDC			
Power consumption	Idle: < 2 W, Max: < 9 W (no PoE device connected)			
PoE standard	802.3af/at (up to 30 W per port, total power budget - 240 W)			
Ethernet	8 x 10/100/1000 Mbps Ethernet ports			
SFP	2 x SFP port for Optical interface			
Status LEDs	16 x Ethernet, 1 x Power, 2 x SFP activity			
Ingress protection rating	IP30			
Operating temperature	-40 °C to 75 °C			
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability			
Dimensions	132 x 44.2 x 95.1 mm			
Weigh	456 g			
Installation	on Desktop, wall or DIN Rail mountable (additional kit needed)			

*PoE operates properly only when connected power supply outputs 44 V or higher voltage

ports

PERFORMANCE SPECIFICATIONS

Bandwidth	20 Gbps		
Packet buffer	128 KB		
Jumbo frame support	9216 bytes		
MAC address table size	2K entries		
Auto MDI/ MDI-X Cable Detection	Yes		

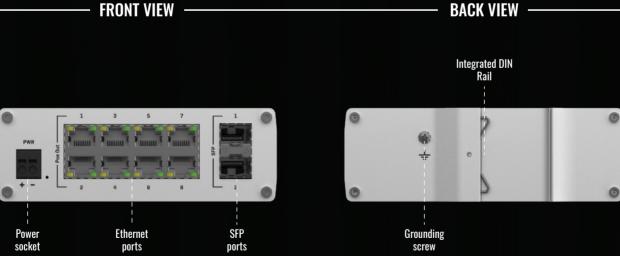

Grounding screw

ports