


# US POWER SUPPLY 62.4 W

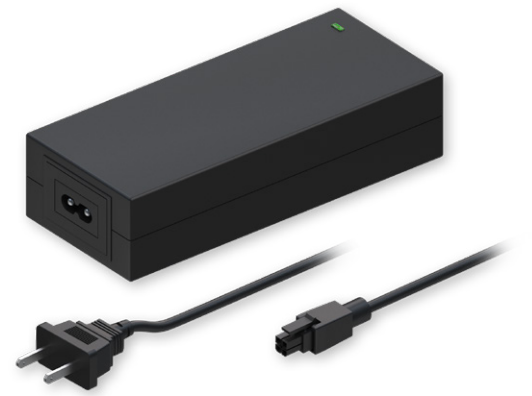

## TECHNICAL DATA

### GENERAL

Input voltage	100 - 240 VAC
Input frequency	50 / 60 Hz
Input current	1.5 A
Input connector	US (Type A)
Output voltage	48 VDC
Output current	1.3 A
Output connector	4-pin, 3 mm pitch
Weight	320 g

### ADDITIONAL

Input voltage range	90 - 264 VAC
Input frequency range	47 - 63 Hz
Maximum input inrush current	50 A
Output voltage maximum deviation	45.6 - 50.4 VDC
Short circuit protection	✓
HIPOT (dielectric withstand test)	Primary to Secondary: 4000 VDC
MTBF	50000 h
Certification	<b>Safety:</b> UL 60950-1 Ed.2, CAN/CSA C22.2 No. 60950-1 Ed.2 <b>EMC:</b> FCC Part 15, Subpart B

