

# RUTM30

## COMPACT 5G ROUTER



RUTM30 360° VIEW

The RUTM30 is a compact dual-SIM multi-network router with eSIM™, offering 5G mobile connectivity for high-speed and data-heavy applications. Together with two Gigabit Ethernet ports and dual-band Wi-Fi, it provides data connection redundancy with auto-failover. Backward compatibility and multiple interfaces allow for long-term expandability and upgrading options. The RUTM30 is an excellent fit in various IoT and M2M solutions that require high-speed connectivity, easy setup, reliable network, and remote accessibility.



### CONNECTIVITY

5G, 4G Cat19, 3G

### DUAL SIM

With auto failover, backup WAN, and other switching scenarios

### eSIM™

Seamless connectivity with eSIM™ SGP.22

### SA & NSA

Supports both architectures to leverage the 5G infrastructure



# RMS

## REMOTE MANAGEMENT SYSTEM

# COMPATIBLE WITH RUTM30

MANAGEMENT

ALERTS

CONFIGURATION

ACCESS

FOTA



# KEY FEATURES


## HARDWARE

Mobile	5G Sub-6Ghz SA/NSA: 2.4/3.4Gbps DL (4x4 MIMO), 900/550 Mbps UL (2x2); 4G LTE: Cat 19 1.6Gbps DL, Cat 18 200Mbps UL; 3G: 42 Mbps DL, 5.76Mbps UL
CPU	MediaTek, Dual-Core, 880 Mhz, MIPS1004Kc
RAM	256MB, DDR3
Storage	16MB serial NOR flash, 256MB serial NAND flash
TPM	Identification and authentication module, TPM 2.0 standard
Powering options	4-pin industrial DC power socket, 9 - 50 VDC
SIM	2 x SIM slots (Mini SIM - 2FF), 1.8 V/3 V, internal SIM holders
eSIM™	Consumer type eSIM™*, profile download and removal operations, up to 7 eSIM™ profiles
Antenna connectors	4 x SMA for Mobile, 2 x RP-SMA for Wi-Fi
Ethernet	2 x RJ45 ports, 10/100/1000 Mbps: 1 x WAN, 1 x LAN
Wi-Fi	802.11b/g/n/ac Wave 2 (Wi-Fi 5) with data transmission rates up to 867 Mbps (Dual Band, MU-MIMO), 802.11r fast transition, Access Point (AP), Station (STA)
Configurable I/O	2 x Configurable digital Inputs/Outputs on 4-pin power connector. Digital Input, 0 - 6 V detected as logic low, 8 - 50 V detected as logic high. Digital Output, Open collector output, max 30 V, 300 mA
Status LEDs	1 x Mobile connection type(RGB), 1 x Mobile connection strength(RGB), 4 x LAN status, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Anodized aluminum housing and panels
Dimensions (W x H x D)	100 x 30 x 93.7 mm
Weight	319 g


## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	eSIM, SIM switch, Status, SMS, USSD, Block/Allow list, Multiple PDN, Band management, SIM idle protection service, SIM PIN code management, APN, Bridge, Passthrough, Framed routing
Wireless features	Wi-Fi security, SSID/ESSID, Wi-Fi users, Wireless Connectivity Features, Wireless MAC filter, Wireless QR code generator, TravelMate
Network features	VoIP passthrough support, Connection monitoring, Firewall, Firewall status page, Ports management, Network topology, Hotspot, DHCP, QoS / Smart Queue Management (SQM), DNS over HTTPS, DDNS, Network backup, Load balancing, SSHFS, VRF support , Traffic Management
Security	Authentication, Firewall, Attack prevention, VLAN, Mobile quota control, WEB filter, Access control, TPM, SSL certificate generation, 802.1x
VPN and tunneling	OpenVPN, OpenVPN Encryption, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP, ZeroTier, WireGuard, Tinc, Tailscale
Monitoring and Management	WEB UI, FOTA, SSH, SMS, Call, Email, TR-069, MQTT, SNMP, JSON-RPC, MODBUS, RMS
Cloud solutions	RMS, ThingWorx, Cumulocity - Cloud of Things, Azure IoT Hub
Services	OPC UA, Modbus, Data to Server, Modbus MQTT GATEWAY, DNP3, DLMS/COSEM

## FRONT VIEW

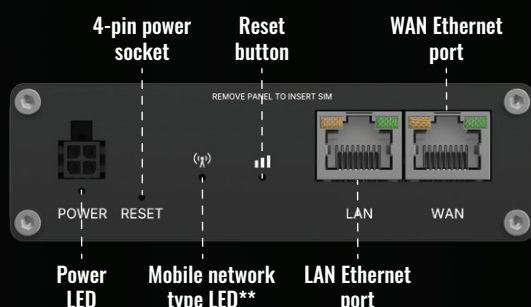

## BACK VIEW

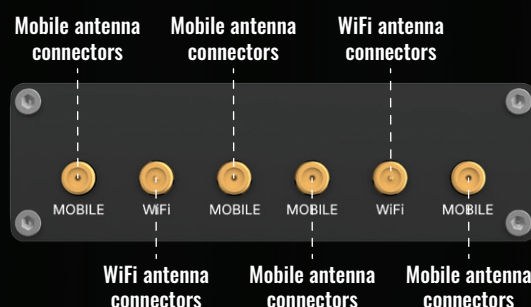

**Mobile signal strenght LED\*** RED color when signal RSSI is between -110 and -82 dBm, YELLOW color when signal RSSI is between -82 and -52 dBm, GREEN color when signal RSSI is more than -51 dBm  
**Mobile network type LED\*** YELLOW color when device is connected to a 3G network, GREEN color when device is connected to a 4G network, BLUE color when device is connected to a 5G network.