

TSW110

L2 UNMANAGED SWITCH



TSW110 360° VIEW



PLUG-N-PLAY

No additional configuration needed

MOUNTING

DIN rail and surface mounting options

9-30 V

Wide range of supported power supply voltages

DURABILITY

Rugged aluminium housing

STATUS LEDS

1 x Power, 10 x Ethernet

GIGABIT ETH

5 x Gigabit Ethernet with speeds up to 1000 Mbps

TSW110

PRODUCT DESCRIPTION

// TSW110 is a layer 2 unmanaged switch, which is a simplified version of our earlier product – TSW100.

// Possible to power up through the first LAN port.

// It has five 10/100/1000 Mbps Ethernet ports for an economical high-bandwidth solution.


// It offers a wide range of supported power supply voltages (9-30 V).

// Ideal for professional high bandwidth applications to provide reliable data connection.



FRONT VIEW

BACK VIEW

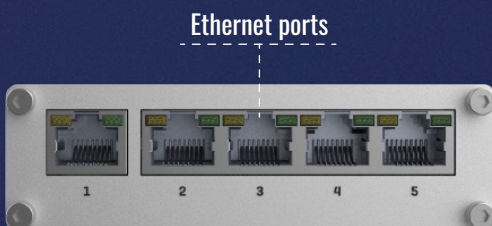

Ethernet ports



Power socket

Grounding screw

KEY FEATURES

HARDWARE

Ethernet	5 x LAN ports 10/100/1000 Mbps
Power supply	9 - 30 V, 4 pin DC connector
Power consumption	idle: < 0.4 W, max: < 1.8 W
PoE input (passive)	Passive PoE over 4,5 (power) and 7,8 (ground) pins. Possibility to power up through first LAN port, not compatible with IEEE802.3af and 802.3at standards
Connectors	1 x 4 pin DC, 5 x Ethernet
Status LEDs	1 x Power, 10 x Ethernet
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with wall or DIN rail mounting option and grounding capability
Dimensions	100 x 30 x 85 mm
Weight	227 g
Installation	Desktop, wall or DIN Rail mountable (additional kit needed)

PERFORMANCE SPECIFICATIONS

Bandwidth	10 Gbps
Packet buffer	128 KB
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

SOCIAL

